


INCH-POUND
MIL-PRF-19207/30D
11 December 2001
SUPERSEDING
MIL-PRF-19207/30C
23 August 1991

PERFORMANCE SPECIFICATION SHEET

FUSEHOLDERS, EXTRACTOR POST TYPE,
NONINDICATING, TYPES FHN46W AND FHN46WB

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-19207.

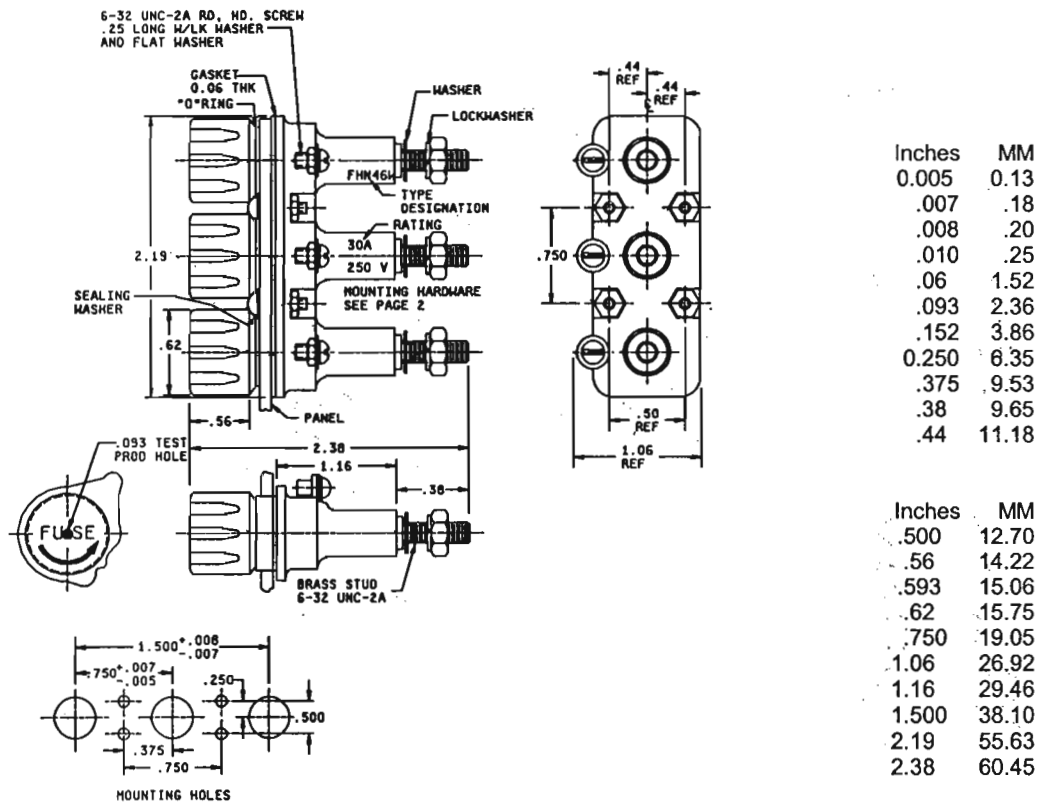

See notes on other page.

FIGURE 1. Type FHN46W and type FHN46WB fuseholder.

MIL-PRF-19207/30D

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Cap and body molding material: Cap and body molding materials shall be selected to enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on cap and body molding material are specified in the notes.

Fuse accommodation:

Ferrule type:

Size: 0.250 inch (6.35 mm) diameter, 1.250 inches (31.75 mm) length.
Styles: MIL-PRF-15160, F02 and F03, and MIL-PRF-23419, FM09.
(or equivalent size and styles)

Poles: Three.

Rating: 30 amperes maximum, 250 volts maximum.

Panel thickness: 0.125 inch (3.18 mm) maximum.

Nonindicating.

Terminals: Stud and screw type.

Enclosure: Watertight or watertight and body sealed (for submarine applications use FHN46WB).

Weight: 3 ounces maximum.

Gaskets and o-rings: Gaskets and o-rings shall be used that enable the fuseholder to meet the performance requirements of this specification. Additional information and guidance on gaskets and o-rings are specified in the notes.

Test fuses:

Temperature rise: F03A125V30A of MIL-PRF-15160/03.
Voltage drop: F03A125V30A of MIL-PRF-15160/03.
Short circuit: F03A250V15A of MIL-PRF-15160/03.

Mechanical shock: Method I of MIL-PRF-19207.

Terminal strength: 20 pounds.

Torque: Cap - 36 inch-pounds, terminal - 12 inch-pounds.

Salt spray (corrosion): Test condition B.

Dielectric:

Sea level: 1,500 volts.
Reduced pressure: 625 volts.

Mounting hardware:

Screw: 6-32UNC-2A, Round head with sealing washer.
Nut: 6-32UNC-2B Hex. A threaded metal insert may be used in lieu of nut.

Type designation: See table I.

TABLE I

Superseding type designation number	Superseded military part number
FHN46W	M19207/30-001
FHN46WB	M19207/30-002

MIL-PRF-19207/30D

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only, and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ± 0.02 (0.51 mm) for two place decimals and ± 0.005 (0.13 mm) for three-place decimals.
4. Cap thread shall be 3/8-32NEF-2 and provide for cap interchangeability.
5. Cap and body molding material: It is recommended that types MAI-60, GDI-30F or SDG-F of American Society for Testing and Materials (ASTM) D5948 be considered for meeting the cap and body molding material requirements of this specification.
6. Gaskets and O-rings: It is recommended that class 3 silicone rubber of A-A-59588 (Rubber, Silicone), be considered for use in meeting the gasket and o-ring material requirements of this specification.

Custodians:

Army - CR
Navy - SH
Air Force - 11
DLA - CC

Preparing activity:

DLA - CC

(Project 5920-0732-09)

Review activities:

Army - AR, AT, CR4, MI
Navy - AS, EC, MC, OS
Air Force - 70, 71