






# PANEL MOUNTED BLOWN FUSE INDICATING FUSEHOLDER (DOUBLE POLE)

**MODEL 5300**  
DOUBLE POLE  
FOR USE WITH  
1/4" x 1 1/4" FUSES



## FEATURES - MODEL 5300 FUSEHOLDER

- A. ALLOWS FOR BLOWN FUSE INDICATION ON BOTH SIDES OF PRIMARY
- B. PROVIDES BLOWN FUSE INDICATION ON PANEL FRONT
- C. UL COMPONENT RECOGNIZED
- D. MEETS OR SURPASSES NEMA ENVIRONMENTAL REQUIREMENTS

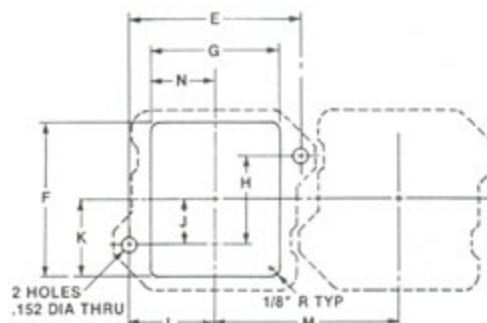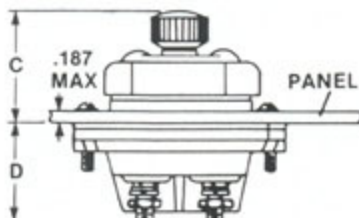

## DIMENSIONS

A	B	C	D	E	F	G	H	J	K	L	M	N
2.09	1.81	1.06	.94	1.78 ± .005	1.59	1.37	.875	.437	.796 ± .010	.89	1.875	.69

## SPECIFICATIONS

### ELECTRICAL:

Fuse: (2) 1/4" x 1 1/4" 3AG OR 3AB Style  
Current: 30 AMP any voltage up to 250V. AC or DC (see voltage chart)  
Dielectric: withstands 1500 volts

### MOLDED PARTS:

Body - Black phenolic  
Lens - Polycarbonate  
90V to 250V, clear  
Less than 90V, amber *OR CLEAR OPTIMAL*

### TERMINALS:

Brass, plated, screw type, #8  
Withstand 15 inch pounds torque

### FUSECLIPS & CONTACTS:

Beryllium copper, silver plated

### MOUNTING HARDWARE:

Gasket: Silicone  
Lockwasher: phos. bronze, plated  
Mounting Screws & Nuts: Steel, plated

### MOUNTING:

Max panel thickness .187"

### CERTIFICATIONS:

UL component recognized & ignition Protected  
file no's E41903 & E79894

### ENCLOSURE:

Watertight from front of panel

### TO ORDER:

Select the voltage range required from the Voltage Chart, suffix it to the basic P/N (Example: 5300-11)

### VOLTAGE CHART

-1	12-22V
-2	23-33V
-3	34-45V
-4	46-60V
-5	61-80V
-6	81-90V
-7	2.5-4V
-8	5-7V
-9	8-11V
-10	1-2.4V
-11	90-250V

MODEL 5300 FUSEHOLDER ACCOMMODATES ALL 1/4" x 1 1/4" FUSES INCLUDING:

BUSS: ABC, AGC, MDL, MSL, MDA, MTH, etc.  
LITTELFUSE: 311, 312, 313, 326, 314, etc.



FIC CORPORATION  
12216 Parklawn Dr.  
Rockville, MD 20852

TOLL FREE: 800-638-6594 • IN MD: 301-881-8124 • FAX: 301/881-0530