



PANEL MOUNTED BLOWN FUSE INDICATING OR NON-INDICATING FUSEHOLDER




MODEL 5900

SINGLE POLE
FOR USE WITH
(1) $1\frac{3}{16} \times 3$ " FUSE



FEATURES MODEL 5900

- A. WATERTIGHT
- B. IDEAL FOR USE IN POWER SUPPLIES
- C. U.L. COMPONENT RECOGNIZED
- D. MEETS OR SURPASSES NEMA REQUIREMENTS

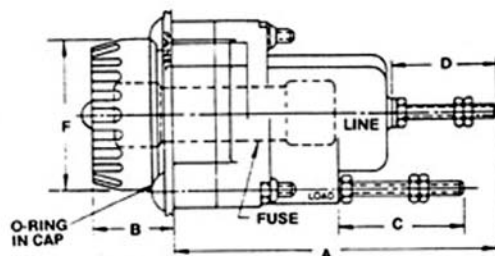

Mounting Dimensions										
DIM.	A	B	C	D	E	F	G	H	J	K
5900	4.250	1.22	1.687	1.375	2.875	2.0	1.75	2.38	1.19	.265

SPECIFICATIONS

ELECTRICAL:

Fuse: (1) $1\frac{3}{16} \times 3$ " 31-60A, RK1 OR RK-5 STYLE
Current: 60 AMP any voltage up to 250V. AC or DC (see voltage chart)
Dielectric: withstands 1500 volts

MOLDED PARTS:

Body - Black phenolic
Lens - Polycarbonate, CLEAR

TERMINALS:

1 COPPER, PLATED, SCREW TYPE $\frac{1}{4}$ "
1 WITHSTAND 15 INCH POUNDS TORQUE

FUSECLIPS & CONTACTS:

Beryllium copper, PLATED

MOUNTING HARDWARE:

Gasket: Silicone
MOUNTING NUT: STEEL, PLATED
MOUNTING SCREW: STEEL, PLATED

MOUNTING:

Max panel thickness .187"

CERTIFICATIONS:

UL component recognized
file no: E41903

ENCLOSURE:

Watertight from front of panel

TO ORDER:

Select the voltage range required from the Voltage Chart, suffix it to the basic P/N (Example: (5900-11))

FOR NON-INDICATING SPECIFY MODEL 5900

VOLTAGE CHART

-1	12-22V
-2	23-33V
-3	34-45V
-4	46-60V
-5	61-80V
-6	81-90V
-7	2.5-4V
-8	5-7V
-9	8-11V
-10	1-2.4V
-11	90-250V



FIC CORPORATION
12216 Parklawn Dr.
Rockville, MD 20852

MODEL 5900 FUSEHOLDER ACCOMMODATES ALL $1\frac{3}{16} \times 3$ " FUSES INCLUDING:

BUSS: FRN-R, LPN-RK, NON, KTN-R, KA5 ETC.
LITTELFUSE: FLN-R, LLN-RK, NLN, KLN-R, ETC
GOULD: FT-R, TR-R, A2D-R, OT, ETC.