

CLASS T – JLLN / JLLS SERIES FUSES

300/600 VAC • Fast-Acting • 1-1200 A


Description

JLLN/JLLS fuses are less than 1/3 the size of comparable Class R fuses and are typically used for short circuit protection of drives and surge sensitive components. When rated in accordance with the NEC®, JLLN/JLLS fuses provide fast-acting overload and short circuit protection for non-inductive circuits and equipment.

Applications

- Variable speed drive protection
- Compact mains switches

Features/Benefits

- Extremely current-limiting
- Compact design
- 200 kA Interrupting Rating

Specifications

Voltage Ratings

AC: 300 V (JLLN)
 600 V (JLLS)
 DC: 160 V (JLLN 1 – 60 A)
 125 V (JLLN 70 – 1200 A)
 300 V (JLLS)

Interrupting Ratings

AC: 200 kA rms symmetrical
 DC: 20 kA (JLLN & JLLS)
 1 – 1200 A

Ampere Range

Approvals

AC: Standard 248-15, Class T
 UL Listed (File: E81895):
 JLLN (1 – 1200 A)
 JLLS (1 – 800 A)
 UL Recognized (File: E71611)
 JLLN PCB Mount (35 – 60 A)
 JLLS (900 – 1200 A)
 CSA Certified (File: LR29862)
 JLLN/JLLS (1 – 600 A)
 DC: UL Listed (File: E81895):
 JLLN (35 – 1200 A)
 Littelfuse self-certified
 JLLN (1 – 30 A)
 JLLS (1 – 1200 A)

Environmental

RoHS Compliant

Ordering Information


AMPERE RATINGS				
1	30	90	250	800
2	35	100	300	900*
3	40	110	350	1000
6	45	125	400	1100
10	50	150	450	1200
15	60	175	500	
20	70	200	600	
25	80	225	700	

*JLLS only

Note: Contact the factory for RoHS compliant Class T fuses.

SERIES	VOLTAGE	AMP	MOUNTING SUFFIX	CATALOG NUMBER	ORDERING NUMBER
JLLS	600	6	–	JLLS006	JLLS006.T
JLLN	300	35	V	JLLN035V	JLLN035.TXV

Part Numbering System

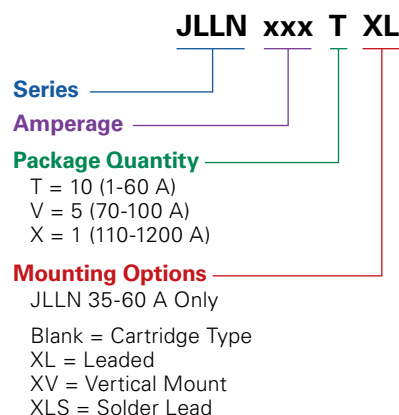

Web Resources

TC Curves, downloadable CAD drawings and other technical information: Littelfuse.com/jlln
Littelfuse.com/jlls

Recommended Fuse Holders


LFT30 Series
 LFT60 Series
 LSCR Series for 700-800 A

Dimensions

Please refer to the Class T dimensions on page 3

CLASS T – JLLN / JLLS SERIES FUSES

Peak Let-Thru Curve and Current-Limiting Effects of JLLN (300 V) Fuses

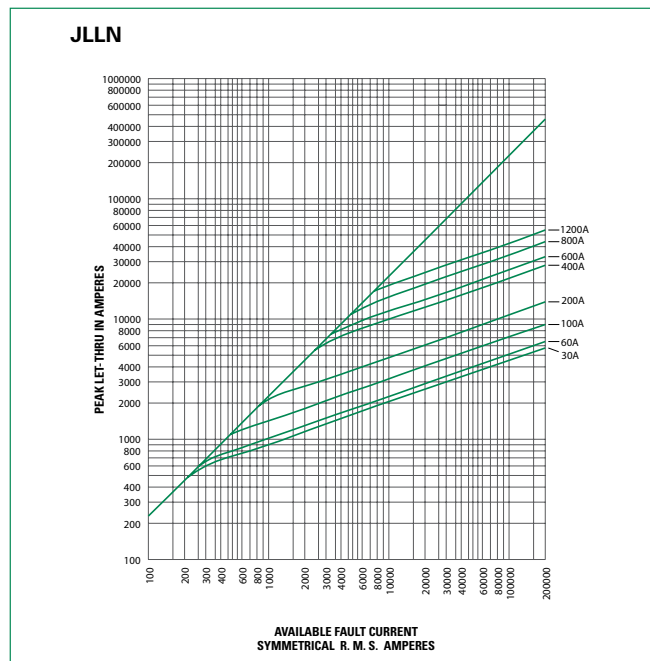


SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	700	775	1,100	1,650	3,500	4,000	5,000	5,000
10,000	900	1,000	1,400	2,100	4,400	5,100	6,750	8,250
15,000	1,000	1,100	1,600	2,400	5,000	5,900	7,750	10,000
20,000	1,100	1,250	1,800	2,700	5,500	6,500	8,750	11,000
25,000	1,230	1,300	1,950	2,900	6,000	7,000	9,500	12,000
30,000	1,300	1,475	2,050	3,100	6,400	7,500	10,000	12,500
35,000	1,330	1,575	2,150	3,300	6,750	7,750	10,500	13,500
40,000	1,430	1,600	2,300	3,500	7,000	8,000	11,000	14,000
50,000	1,500	1,750	2,400	3,700	7,500	8,750	12,000	15,000
60,000	1,700	1,900	2,700	4,000	8,000	9,500	12,500	16,000
80,000	1,850	2,100	2,800	4,400	9,000	10,500	14,000	17,500
100,000	2,000	2,250	3,150	4,800	9,750	11,500	15,000	18,500
150,000	2,300	2,600	3,600	5,500	11,000	13,000	17,500	22,000
200,000	2,600	2,800	3,900	6,000	12,000	14,500	19,500	24,000

*Prospective RMS Symmetrical Amperes Short-Circuit Current

Note: Data Derived from Peak Let-Thru Curves

Peak Let-Thru Curve and Current-Limiting Effects of JLLS (600 V) Fuses

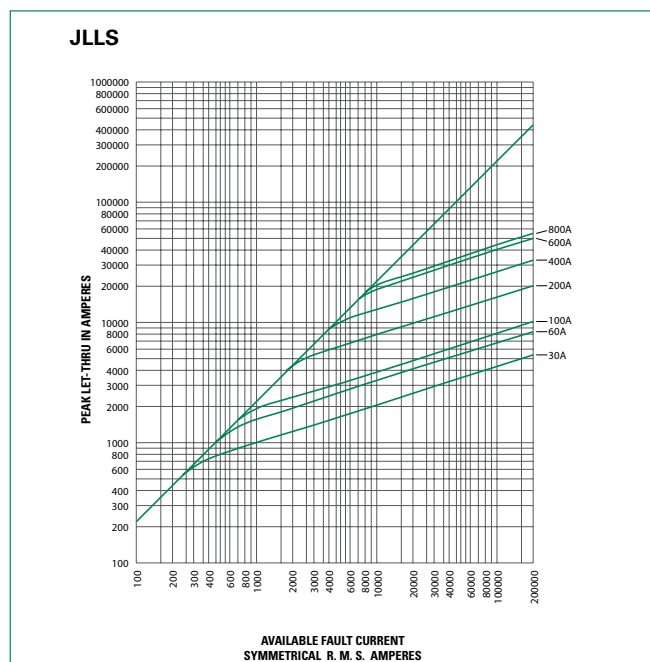

SHORT CIRCUIT CURRENT*	APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS							
	30 A	60 A	100 A	200 A	400 A	600 A	800 A	1200 A
5,000	750	1,225	1,400	2,850	4,600	5,000	5,000	5,000
10,000	945	1,525	1,700	3,600	6,000	8,500	9,400	10,000
15,000	1,050	1,700	2,000	4,050	6,600	9,750	10,500	13,000
20,000	1,150	1,900	2,200	4,450	7,250	10,500	11,000	14,750
25,000	1,300	2,050	2,400	4,800	8,000	11,500	12,500	15,500
30,000	1,375	2,150	2,450	5,000	8,250	12,000	13,750	16,500
35,000	1,400	2,250	2,600	5,100	8,500	13,000	14,000	17,000
40,000	1,425	2,400	2,800	5,200	8,700	14,000	14,750	18,000
50,000	1,600	2,450	2,900	6,000	9,500	14,500	16,000	20,000
60,000	1,650	2,625	3,100	6,250	10,000	15,500	17,300	21,000
80,000	1,825	2,800	3,400	7,000	11,000	17,000	18,750	23,000
100,000	2,000	3,100	3,700	7,250	12,000	18,000	20,000	25,000
150,000	2,250	3,400	4,300	8,500	13,000	21,000	23,000	28,500
200,000	2,450	3,800	4,600	9,000	15,000	23,000	25,000	31,000

*Prospective RMS Symmetrical Amperes Short-Circuit Current

Note: Data Derived from Peak Let-Thru Curves

CLASS T – JLLN / JLLS SERIES FUSES

Dimensions Inches (mm)

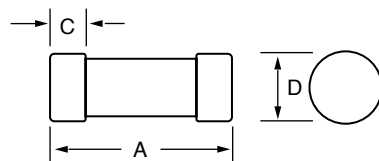


Fig. 1




Fig. 2


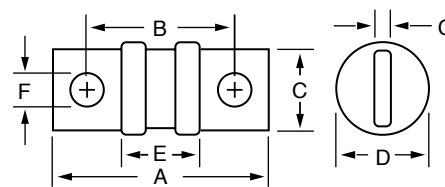


Fig. 3


AMPERES	REFER TO FIG. NO.	SERIES	DIMENSIONS INCHES (mm)						
			A	B	C	D	E	F	G
1 – 30	1	JLLN	$\frac{7}{8}$ (22.2)	—	$\frac{9}{32}$ (7.1)	$\frac{13}{32}$ (10.3)	—	—	—
		JLLS	$1\frac{1}{2}$ (38.1)	—	$\frac{9}{32}$ (7.1)	$\frac{9}{16}$ (14.3)	—	—	—
35 – 60	1	JLLN	$\frac{7}{8}$ (22.2)	—	$\frac{9}{32}$ (7.1)	$\frac{9}{16}$ (14.3)	—	—	—
		JLLS	$1\frac{9}{16}$ (39.7)	$\frac{13}{16}$ (20.6)	$\frac{13}{32}$ (10.3)	1 (25.4)	$\frac{1}{16}$ (1.6)	$1\frac{3}{32}$ (27.8)	—
70 – 100	3	JLLN	$2\frac{5}{8}$ (54.8)	$1\frac{9}{16}$ (39.7)	$\frac{3}{4}$ (19.1)	$\frac{13}{16}$ (20.6)	$\frac{27}{32}$ (21.4)	$\frac{9}{32}$ (7.1)	$\frac{1}{8}$ (3.2)
		JLLS	$2\frac{61}{64}$ (75.0)	$2\frac{23}{64}$ (59.9)	$\frac{3}{4}$ (19.1)	$\frac{13}{16}$ (20.6)	$1\frac{41}{64}$ (41.7)	$\frac{9}{32}$ (7.1)	$\frac{1}{8}$ (3.2)
110 – 200	3	JLLN	$2\frac{7}{16}$ (61.9)	$1\frac{11}{16}$ (42.9)	$\frac{7}{8}$ (22.2)	$1\frac{1}{16}$ (27.0)	$\frac{27}{32}$ (21.4)	$1\frac{1}{32}$ (8.7)	$\frac{3}{16}$ (4.8)
		JLLS	$3\frac{3}{4}$ (82.6)	$2\frac{1}{2}$ (63.5)	$\frac{7}{8}$ (22.2)	$1\frac{1}{16}$ (27.0)	$1\frac{21}{32}$ (42.1)	$1\frac{1}{32}$ (8.7)	$\frac{3}{16}$ (4.8)
225 – 400	3	JLLN	$2\frac{3}{4}$ (69.9)	$1\frac{27}{32}$ (46.8)	1 (25.4)	$1\frac{5}{16}$ (33.3)	$\frac{53}{64}$ (21.0)	$\frac{13}{32}$ (10.3)	$\frac{1}{4}$ (6.4)
		JLLS	$3\frac{5}{8}$ (92.1)	$2\frac{23}{32}$ (69.1)	1 (25.4)	$1\frac{19}{32}$ (40.5)	$1\frac{23}{32}$ (43.7)	$\frac{13}{32}$ (10.3)	$\frac{1}{4}$ (6.4)
450 – 600	3	JLLN	$3\frac{1}{16}$ (77.8)	$2\frac{1}{32}$ (51.6)	$1\frac{1}{4}$ (31.8)	$1\frac{19}{32}$ (40.5)	$\frac{7}{8}$ (22.2)	$3\frac{1}{64}$ (12.3)	$\frac{5}{16}$ (7.9)
		JLLS	$3\frac{83}{64}$ (101.2)	$2\frac{61}{64}$ (75.0)	$1\frac{1}{4}$ (31.8)	$2\frac{1}{16}$ (52.4)	$1\frac{49}{64}$ (44.8)	$3\frac{1}{64}$ (12.3)	$\frac{5}{16}$ (7.9)
700 – 800	3	JLLN	$3\frac{3}{8}$ (85.7)	$2\frac{1}{32}$ (64.3)	$1\frac{3}{4}$ (44.5)	$2\frac{1}{16}$ (52.4)	$\frac{7}{8}$ (22.2)	$3\frac{5}{64}$ (13.9)	$\frac{3}{8}$ (9.5)
		JLLS	$4\frac{21}{64}$ (109.9)	$3\frac{11}{64}$ (80.6)	$1\frac{3}{4}$ (44.5)	$2\frac{1}{2}$ (63.5)	$1\frac{55}{64}$ (47.2)	$3\frac{5}{64}$ (13.9)	$\frac{3}{8}$ (9.5)
900 – 1200	3	JLLN	4 (101.6)	$2\frac{17}{32}$ (64.3)	2 (50.8)	$2\frac{1}{2}$ (63.5)	$1\frac{1}{32}$ (26.2)	$3\frac{9}{64}$ (15.5)	$\frac{7}{16}$ (11.1)
		JLLS	5.27 (133.9)	3.80 (96.5)	2 (50.8)	2.63 (66.8)	2.30 (58.4)	0.67 (15.5)	0.44 (11.2)

PCB Mounting Options (JLLN 35-60 A Only)

Vertical Mount JLLN-V

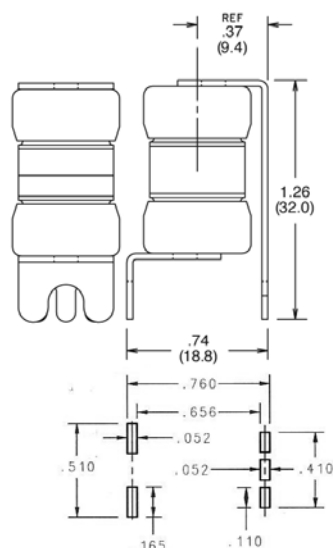

Leaded JLLN-L

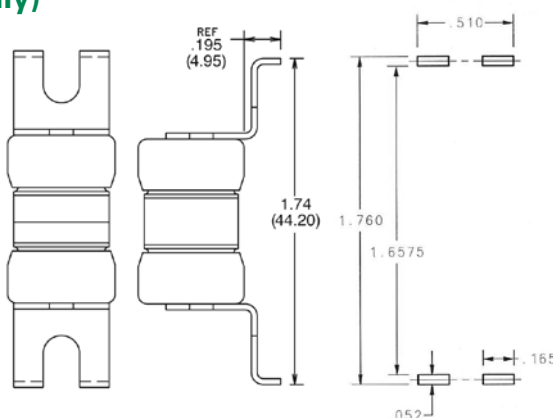

Solder JLLN-LS

